



Linear Indoor LED IG 800

Targeted under-canopy support that strengthens lower-zone development.


Designed to enhance lower canopy performance, this compact lighting solution delivers focused supplemental coverage where plants need it most. Its low-profile design allows for quick and flexible installation while integrating seamlessly with primary top-lighting systems to create a more balanced and complete lighting environment.





SPECIFICATIONS

Light Version	IG HPL800
AC Input Power	800W
Light Source	LED
Spectrum	Full spectrum
Efficacy up to	3.25 $\mu\text{mol}/\text{J}$
PPF(380-780nm) up to	2600 $\mu\text{mol}/\text{s}$
AC Input Voltage	200-277 VAC
Frequency	50/60Hz
Light Distribution	120°
Mounting Height	$\geq 12"$ Above Canopy
Thermal Management	Passive
Max Ambient Temp	104°F/40°C
Dimming	0-10V
Power Factor	> 0.95
Total Harmonic Distortion	< 10%
Lifetime	> 50,000hrs
IP Rating	IP66
Warranty	5 Years Limited Warranty
Overall Dimensions	43.3" x 43.3" x 4.1"

DIMENSIONS

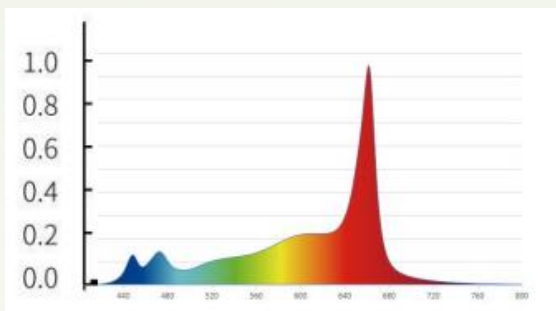

SPECTRUM

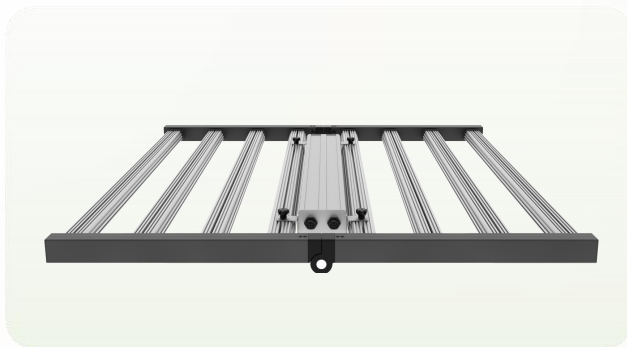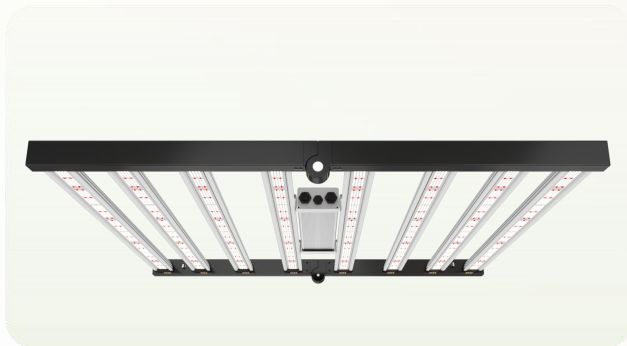

Folded State

APPEARANCE





INNOVŌGROW

————— Enlightened by Design —————